

The Original **WEAVER WINCH**

Mounting Instructions

To install the Weaver Winch you should have the winch higher than the dinghy when the dinghy is in the vertical position (See Picture A). For installing the Weaver Quick Kit see Quick Kit Instruction sheet. Make sure that the winch slides into the Weaver Quick Kit bow to stern or if you are looking at your dinghy the handle needs to be on the left hand side.

To operate the Weaver Winch when raising the dinghy the first thing you need to do is take the slack out of the rope by loosening the brass thumb screw on the right side (see Picture D). Next you need to have the switch on the handle so it ratchets counter clock wise (See Picture B). Make sure the rope will feed on the bottom of the spool if it is mounted on the sun deck. (See Picture D for how to wind the Rope).



Picture A




Picture B

To operate the Weaver Winch when lowering the dinghy you need to switch the handle lever to the other position and have pressure on the line at all times (see Picture C). It is a braking style winch in the down position (just like a come along). The handle hub needs to be tight against the spool allowing it to lock into place when going down.

If the Weaver Winch locks up and free wheels when going up or down and does not lock into place, this is what you need to do: if the handle is jammed against the nut on the winch spool loosen the nut (see Picture D). Use a 3/4" socket or wrench to loosen the nut, move the handle into the spool and tighten the nut and the winch should work again. If you have any questions please give us a call at 1-800-367-4062.



Picture C

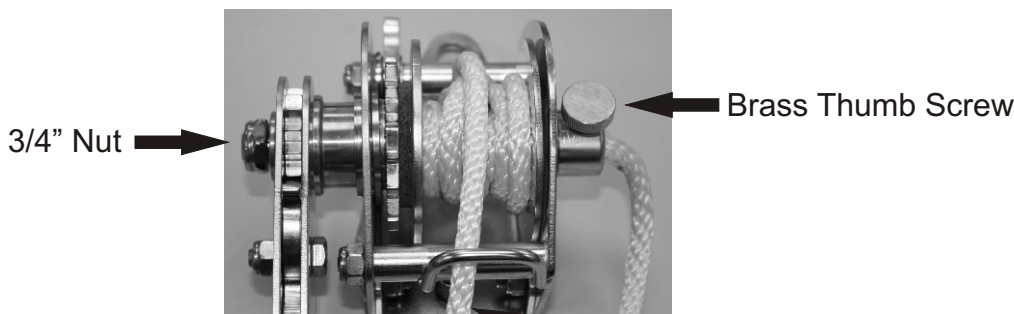

Picture D

How to spool the Rope

